




Liitäntälaitteet 24V CV-DRIVER 24V 60W IP20

Power sources for 24 V LED strips for indoor and outdoor use.

60W 24V IP20 The power source is equipped with an integrated connection box to enable easy installation and linking. Suitable for use with the 5 m Coloris and Ambiance LED strips.

CV-DRIVER 24V 60W IP20

| PRODUCT CODE | CODE | KG | PRODUCT FAMILY |
|--------------|--------|-------|----------------------|
| 4016034 | A1LEAB | 0.316 | Liitäntälaitteet 24V |

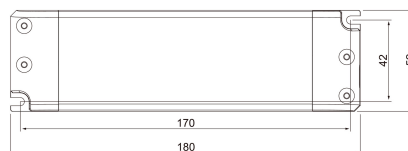

CV-DRIVER 24V 60W IP20

EC002710

| Mounting | |
|---------------------------|------|
| Suitable for outdoor use | No |
| Degree of protection (IP) | IP20 |

| Structure | |
|-------------------------------|-----------------|
| Model | Static |
| Housing | Plastic housing |
| Emergency power supply system | None |

| Dimming and control | |
|---|-----|
| Dimmable | No |
| Dimming 0-10 V | No |
| Dimming 1-10 V | No |
| Dimming D4i | No |
| Dimming DALI | No |
| Dimming DALI-2 | No |
| Dimming DMX | No |
| Dimming DSI | No |
| Dimming LineSwitch | No |
| Dimming mains voltage modulation | No |
| Dimming manufacturer's proprietary system | No |
| Dimming trailing edge | No |
| Dimming leading edge | No |
| Dimming potentiometer (integrated) | No |
| Dimming programmable | No |
| Dimming RF | No |
| Dimming Sine Wave Reduction | No |
| Dimming Touch and Dim | No |
| Dimming with push-button | No |
| Dimming Zigbee | No |
| No dimming function | Yes |
| Constant luminous flux control | No |
| Bluetooth operated | No |
| Compatible with Apple HomeKit | No |
| Compatible with Google Assistant | No |
| Compatible with Amazon Alexa | No |
| Compatible with Casambi | No |
| IFTTT support available | No |

| Photometric data | |
|------------------|--|
|------------------|--|

| Lifetime and capacity | |
|--------------------------------|-------|
| Ambient temperature (min) [°C] | 0 |
| Ambient temperature (max) [°C] | 25 |
| Driver lifetime (h) | 50000 |

| Measurements | |
|--------------|-----|
| Length (mm) | 180 |
| Width (mm) | 52 |
| Height (mm) | 30 |

| Electrotechnical data | |
|---|------|
| Suitable for constant current | No |
| Suitable for constant voltage | Yes |
| Output voltage (min) (V) | 24 |
| Output voltage (max) (V) | 24 |
| Output current (max) (mA) | 2500 |
| Suitable for DC-voltage (primary side) | No |
| Output power (min) (W) | 1 |
| Input voltage (min) (V) | 220 |
| Input voltage (max) (V) | 240 |
| Frequency input voltage (min) (Hz) | 50 |
| Frequency input voltage (max) (Hz) | 60 |
| Protection class according to IEC 61140 | II |