




Liitäntälaitteet 24V CV-DRIVER 24V 150W IP67


Power sources for 24 V LED strips for indoor and outdoor use.

150W 24V IP67 A power source for 24 V LED strips for use outdoors and in wet spaces. Both ends of the ballast power source are equipped with a rubber cable with open wire ends.

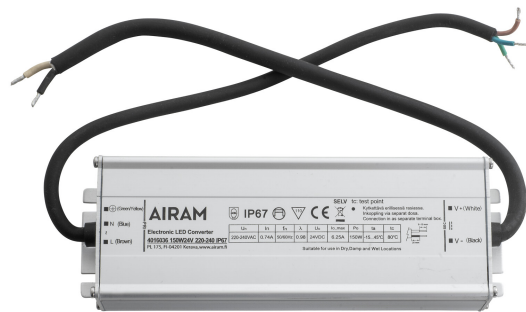

CV-DRIVER 24V 150W IP67

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4016036	A1LEAD	0.84	Liitäntälaitteet 24V

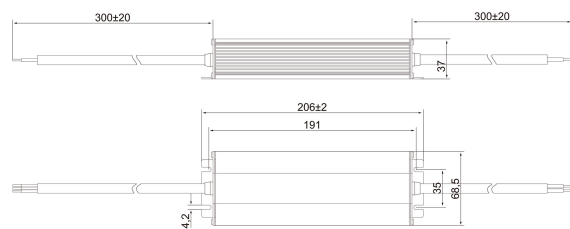

CV-DRIVER 24V 150W IP67

EC002710

Mounting

Suitable for outdoor use	Yes
Degree of protection (IP)	IP67

Structure

Model	Static
Housing	Metal housing
Emergency power supply system	None

Dimming and control

Dimmable	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming D4i	No
Dimming DALI	No
Dimming DALI-2	No
Dimming DMX	No
Dimming DSI	No
Dimming LineSwitch	No
Dimming mains voltage modulation	No
Dimming manufacturer's proprietary system	No
Dimming trailing edge	No
Dimming leading edge	No
Dimming potentiometer (integrated)	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming with push-button	No
Dimming Zigbee	No
No dimming function	Yes
Constant luminous flux control	No
Bluetooth operated	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
Compatible with Casambi	No
IFTTT support available	No

Photometric data**Lifetime and capacity**

Ambient temperature (min) [°C]	-15
Ambient temperature (max) [°C]	25
Driver lifetime (h)	50000

Measurements

Length (mm)	207
Width (mm)	69
Height (mm)	37

Electrotechnical data

Suitable for constant current	No
Suitable for constant voltage	Yes
Output voltage (min) (V)	24
Output voltage (max) (V)	24
Output current (max) (mA)	6250
Suitable for DC-voltage (primary side)	No
Output power (min) (W)	1
Input voltage (min) (V)	220
Input voltage (max) (V)	240
Frequency input voltage (min) (Hz)	50
Frequency input voltage (max) (Hz)	60
Protection class according to IEC 61140	II