

Compact XL

170 IP54 12W 3CCT PIR WH


Downlight

Compact XL is a versatile and high-quality downlight family that provides evenly distributed light. The range is designed for public spaces such as lobbies and corridors, as well as particularly for offices and educational facilities. The luminaire is also well suited for renovation projects. The family includes luminaires in several sizes as well as a PIR version. The luminaires are designed to minimise glare, with a UGR value below 19. Multiple options are available for output and colour temperature. The luminaires are highly energy-efficient, offer a long lifetime, and deliver excellent lm/W performance. The accessory range is particularly extensive, enabling flexible lighting solutions tailored to project requirements. The trim is available in three standard colours and can also be customised project-specifically according to the RAL Classic colour chart. The reflector is available in four different colours. Adapter frames are also available as accessories, allowing the luminaires to be fitted into larger cut-out openings.

Compact XL Downlight 6W-12W 3000/3500/4000K 1050-1650lm Medium beam 20-40°; Non-dimmable; IP54; IK03; SC II; L70B50 100000h; CRI>80; SDCM3; Suitable for loop-in wiring; 4x2.5mm²; Housing aluminium; Colour white; Cover transparent plastic; C16 maks. 119

Stocked: Yes

170 IP54 12W 3CCT PIR WH			
PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4146963	4146963	0.61	Compact XL

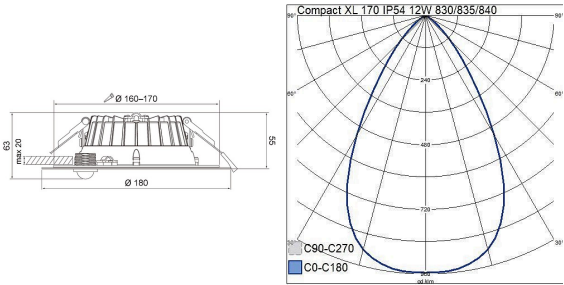

170 IP54 12W 3CCT PIR WH

EC001744 Downlight / spot luminaire / floodlight

Mounting	
Suitable for surface mounting	No
Suitable for recessed mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
Suitable for low voltage cable system	No
Degree of protection (IP)	IP54
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP54
Impact strength	IK03
Emergency function monitoring system	None
Type of wiring	Suitable for through wiring
Number of poles	4
Conductor cross section (mm ²)	2.5 mm ²
Connectable conductor cross section (min) (mm ²)	1.5 mm ²
Connectable conductor cross section (max) (mm ²)	2.5 mm ²
Connection type	Crimping
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	Yes
Max. number of luminaires per miniature circuit breaker B16	119
Max. number of luminaires per miniature circuit breaker C16	119
Fit for workplace acc. EN 12464-1	Yes
Luminaire may be covered with thermally insulating material	No

Structure	
Adjustability	Not adjustable
Lamp type	LED not exchangeable
Light source included	Yes
Suitable for number of lamps	1
Lamp holder	Other
Housing material	Aluminium
Surface protection	Powder coating
Housing colour	White
Cover material	Plastic, transparent
Surface brushed	No
Control gear included	Yes
Exchangeable control gear	Yes
Reflector	High-gloss
Reflector colour	Silver
Energy efficiency class of light source according to EU regulation 2019/2015	D
Containing product according to 2019/2020/EU	Yes
Emergency power supply system	None
Emergency power supply integrated	No
Filament test according to IEC 60695-2-11	650 °C - 30 s

Dimming and control	
With movement sensor	Yes
With presence indicator	Yes
Movement sensor/presence detector technology	Passive infrared
With light sensor	Yes
Dimmable	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI-2	No
Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming trailing edge	No
Dimming leading edge	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	Yes
Constant luminous flux control	No
IFTTT support available	No
Compatible with Apple HomeKit	No
Bluetooth operated	No
Compatible with Google Assistant	No
Compatible with Casambi	No
Compatible with Amazon Alexa	No

Electrotechnical data	
Voltage type	AC
Nominal voltage (min) (V)	220 V
Nominal voltage (max) (V)	240 V
Nominal current (min) (mA)	200 mA
Nominal current (max) (mA)	350 mA
Type of control gear	LED operating device current-controlled
Total harmonic distortion (THD) (%)	10 %
Total harmonic distortion	10 THD
Protection class according to IEC 61140	II
Suitable for lamp power (min) (W)	6 W
Suitable for lamp power (max) (W)	12 W
Maximum system power (W)	12 W
Luminaire efficacy (min) (lm/W)	140 lm/W
Luminaire efficacy (max) (lm/W)	140 lm/W
Power factor	0.9
Luminaire efficacy (lm/W)	150 lm/W

Photometric data	
Light distributor	Reflector
Light sharing	Symmetric
Beam angle	Medium beam 20-40°
Light outlet	Direct
Colour of light (alphanumeric)	White
Colour temperature (min) (K)	3000 K
Colour temperature (max) (K)	4000 K
Colour temperature switchable	Discrete positions
Colour rendering index (CRI/Ra)	80-89
Luminous flux (min) (lm)	1050 lm
Luminous flux (max) (lm)	1650 lm
Effective luminous flux (lm)	1650 lm
Rated luminous flux according to IEC 62722-2-1 (min) (lm)	1050 lm
Rated luminous flux according to IEC 62722-2-1 (max) (lm)	1650 lm
Lumen setting adjustable	Positions
Flickering value Pst LM	1
Beam angle adjustable	No
Stroboscope effect value SVM	0.4
Photobiological safety according to EN 62471	RG0
Colour consistency (McAdam ellipse)	SDCM3
Unified Glare Rating (UGR)	19

Lifetime and capacity	
Rated life time L70/B50 at 25 °C (h)	100000 h
Rated life time L80/B50 at 25 °C	75000 h
Lumen maintenance at median useful life of 35,000 hrs at 25 °C ambient (tq) (%)	95 %
Lumen maintenance at median useful life of 50,000 hrs at 25 °C ambient (tq) (%)	90 %
Lumen maintenance at median useful life of 100,000 hr at 25 °C ambient (tq)	80 %
Failure rate at median useful life of 35,000 hrs at 25 °C ambient (tq) (%)	5 %
Failure rate at median useful life of 50,000 hrs at 25 °C ambient (tq) (%)	5 %
Failure rate at median useful life of 100,000 hrs at 25 °C ambient (tq)	10 %
Rated ambient temperature acc. IEC62722-2-1 (min) (°C)	0 °C
Rated ambient temperature acc. IEC62722-2-1 (max) (°C)	25 °C

Measurements	
Length (mm)	190 mm
Width (mm)	180 mm
Height/depth (mm)	61 mm
Outer diameter (mm)	190 mm
Built-in length (mm)	59 mm
Built-in width (mm)	170 mm
Built-in height/depth (mm)	170 mm
Installation height (min) (mm)	2000 mm
Installation height (max) (mm)	5000 mm
Recess diameter (min) (mm)	160 mm
Recess diameter (max) (mm)	170 mm