

Compact Multi

IP54 7W 927/933/940 DIM BK 6-pack



Downlight

Compact Multi is a responsibly manufactured and high-quality downlight. The light fixture is made of recycled aluminum and plastic. Compact Multi is an ecological choice, as its light source is easily replaceable by the user, which extends the life of the fixture. This adjustable unit is suitable both for general lighting and for highlighting details. It is used in residential buildings and public spaces that require high-quality color rendering, such as museums, restaurants, galleries and hotels. The color temperature of the fixture can be selected from three options before installation. The downlight is dimmable, which offers additional options for atmospheric lighting in the space.

Compact Multi 7W 2700K 500lm Beam angle Medium beam 20-40°; Dim phase cut-off; Dim phase cut-on; IP54; IK02; Protection cl. II; L70B50 100000h; LED exchangeable; Lamp included; CRI>90; SDCM3; Suitable for through wiring; 3x1.5mm²; Housing Plastic; Colour bk; Cover Plastic, transparent; C16 max. 238

Stocked: Yes

IP54 7W 927/933/940 DIM BK 6-pack			
PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4146968	4146968	1.28	Compact Multi

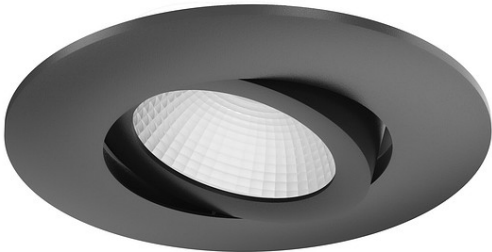

IP54 7W 927/933/940 DIM BK 6-pack

EC001744 Downlight / spot luminaire / floodlight

Mounting	
Suitable for surface mounting	No
Suitable for recessed mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Suitable for clamp-mounting	No
Suitable for low voltage cable system	No
Degree of protection (IP)	IP54
Degree of protection (IP), rear side	IP20
Degree of protection (IP), front side	IP54
Impact strength	IK02
Emergency function monitoring system	None
Type of wiring	Suitable for through wiring
Number of poles	3
Conductor cross section (mm ²)	1.5 mm ²
Connectable conductor cross section (min) (mm ²)	0.75 mm ²
Connectable conductor cross section (max) (mm ²)	1.5 mm ²
Connection type	Screwless terminal
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	Yes
Max. number of luminaires per miniature circuit breaker B16	119
Max. number of luminaires per miniature circuit breaker C16	238
Fit for workplace acc. EN 12464-1	No
Luminaire may be covered with thermally insulating material	No

Structure	
Adjustability	Swivelling
Lamp type	LED exchangeable
Light source included	Yes
Suitable for number of lamps	1
Lamp holder	Other
Housing material	Plastic
Surface protection	Plastic-coated
Housing colour	Black
Cover material	Plastic, transparent
Surface brushed	No
Control gear included	Yes
Exchangeable control gear	Yes
Reflector	High-gloss
Reflector colour	Silver
Energy efficiency class of light source according to EU regulation 2019/2015	F
Containing product according to 2019/2020/EU	Yes
Emergency power supply system	None
Emergency power supply integrated	No
Filament test according to IEC 60695-2-11	650 °C - 30 s

Dimming and control	
With movement sensor	No
With presence indicator	No
With light sensor	No
Dimmable	Yes
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI-2	No
Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming trailing edge	Yes
Dimming leading edge	Yes
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	No
Constant luminous flux control	No
IFTTT support available	No
Compatible with Apple HomeKit	No
Bluetooth operated	No
Compatible with Google Assistant	No
Compatible with Casambi	No
Compatible with Amazon Alexa	No

Electrotechnical data	
Voltage type	AC
Nominal voltage (min) (V)	220 V
Nominal voltage (max) (V)	240 V
Nominal current (min) (mA)	350 mA
Nominal current (max) (mA)	350 mA
Type of control gear	LED operating device current- controlled
Total harmonic distortion (THD) (%)	20 %
Total harmonic distortion	20 THD
Protection class according to IEC 61140	II
Suitable for lamp power (min) (W)	7 W
Suitable for lamp power (max) (W)	7 W
Maximum system power (W)	7 W
Luminaire efficacy (min) (lm/W)	70 lm/W
Luminaire efficacy (max) (lm/W)	70 lm/W
Power factor	0.9
Luminaire efficacy (lm/W)	70 lm/W

Photometric data	
Light distributor	Reflector
Light sharing	Symmetric
Beam angle	Medium beam 20-40°
Light outlet	Direct
Colour of light (alphanumeric)	White
Colour temperature (min) (K)	2700 K
Colour temperature (max) (K)	4000 K
Colour temperature switchable	Discrete positions
Colour rendering index (CRI/Ra)	90-100
Luminous flux (min) (lm)	450 lm
Luminous flux (max) (lm)	500 lm
Effective luminous flux (lm)	500 lm
Rated luminous flux according to IEC 62722-2-1 (min) (lm)	450 lm
Rated luminous flux according to IEC 62722-2-1 (max) (lm)	500 lm
Lumen setting adjustable	No
Flickering value Pst LM	1
Beam angle adjustable	No
Stroboscope effect value SVM	0.4
Photobiological safety according to EN 62471	RG0
Colour consistency (McAdam ellipse)	SDCM3
Unified Glare Rating (UGR)	22

Lifetime and capacity	
Rated life time L70/B50 at 25 °C (h)	100000 h
Rated life time L80/B50 at 25 °C	65000 h
Lumen maintenance at median useful life of 35,000 hrs at 25 °C ambient (tq) (%)	95 %
Lumen maintenance at median useful life of 50,000 hrs at 25 °C ambient (tq) (%)	90 %
Failure rate at median useful life of 35,000 hrs at 25 °C ambient (tq) (%)	5 %
Failure rate at median useful life of 50,000 hrs at 25 °C ambient (tq) (%)	5 %
Rated ambient temperature acc. IEC62722-2-1 (min) (°C)	0 °C
Rated ambient temperature acc. IEC62722-2-1 (max) (°C)	25 °C

Measurements	
Length (mm)	90 mm
Width (mm)	90 mm
Height/depth (mm)	39 mm
Outer diameter (mm)	90 mm
Built-in length (mm)	80 mm
Built-in width (mm)	80 mm
Built-in width (min) (mm)	68 mm
Built-in width (max) (mm)	80 mm
Built-in height/depth (mm)	35 mm
Installation height (min) (mm)	2000 mm
Installation height (max) (mm)	6000 mm
Recess diameter (min) (mm)	68 mm
Recess diameter (max) (mm)	80 mm