

Base

1500 IP20 2xG13 LED WH


Industrial luminaire open

Base is a cost-efficient basic batten luminaire designed for use with LED tubes that correspond to fluorescent tubes with the G13 base. Its typical applications include the dry spaces of warehouses, stores and offices. The luminaires are suitable for surface mounting.

Base Industrial luminaire open No dim; IP20; Protection cl. I; LED exchangeable; 2xG13 not incl; Suitable for through wiring; 3x2.5mm²; Material Steel; Colour wh

Stocked: Yes

1500 IP20 2xG13 LED WH			
PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4338509	4338509	3.8	Base

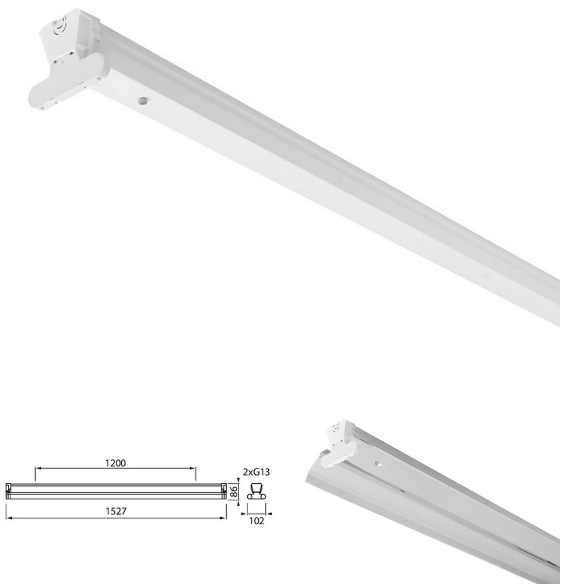

1500 IP20 2xG13 LED WH

EC000109 Batten luminaire

Structure	
Lamp type	LED exchangeable
Light source included	No
Suitable for number of lamps	2
Lamp holder	G13
Material	Steel
Housing colour	White
Control gear included	No
Exchangeable control gear	No
Energy efficiency class of light source according to EU regulation 2019/2015	Not required
Containing product according to 2019/2020/EU	No
With lamp protection cage	No
Emergency power supply integrated	No
Emergency power supply system	None
Filament test according to IEC 60695-2-11	650 °C - 30 s
With switch	No
Electrotechnical data	
Voltage type	AC
Type of control gear	Not required
Protection class according to IEC 61140	I

Dimming and control	
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming DALI-2	No
Dimming DMX	No
Dimming DSI	No
Dimming LineSwitch	No
Dimming mains voltage modulation	No
Dimming manufacturer's proprietary system	No
Dimming trailing edge	No
Dimming leading edge	No
Dimming potentiometer (integrated)	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming with push-button	No
Dimming Zigbee	No
No dimming function	Yes
Constant luminous flux control	No
With movement sensor	No
With presence indicator	No
With light sensor	No
Bluetooth operated	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
Compatible with Casambi	No
IFTTT support available	No
Photometric data	
Light distributor	None
Colour temperature switchable	No
Lumen setting adjustable	No
Beam angle adjustable	No

Mounting	
Degree of protection (IP)	IP20
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	No
Suitable for emergency lighting	No
Emergency function monitoring system	None
Type of wiring	Suitable for through wiring
Number of poles	3
Conductor cross section (mm ²)	2.5 mm ²
Connection type	Screwless terminal
Connectable conductor cross section (min) (mm ²)	1.5 mm ²
Connectable conductor cross section (max) (mm ²)	2.5 mm ²
Electrical connection with connector system	No

Measurements	
Width (mm)	102 mm
Height/depth (mm)	86 mm
Length (mm)	1527 mm