

Plata

IP20 40W/830 EU PSO WH


Modular luminaire

Plata is a low-profile modular luminaire designed for offices, corridors, lobbies, schools and other public spaces. Anti-glare models equipped with micro-prismatic (MP) diffusers offer an excellent solution for classrooms and spaces where computers and other equipment with displays are used. Plata is suitable for recessed mounting in false ceilings, which makes it ideal for offices and public spaces. It can also be suspended on wires or surface-mounted with a separate mounting set. The control options are on/off, Dali-2, pushbutton (direct pushbutton control 230V) and Casambi.

Plata Modular luminaire 40W 3000K 4100lm No dim; IP20; IK02; Protection cl. II; L70B50 100000h; LED not exchangeable; Lamp included; CRI>80; SDCM3; Ending; 2x0.75mm²; Housing al; Colour wh; Cover Plastic, opal; C16 max. 52

Stocked: No

| IP20 40W/830 EU PSO WH |           |    |                |
|------------------------|-----------|----|----------------|
| PRODUCT CODE           | CODE      | KG | PRODUCT FAMILY |
|                        | A1UPAQ-EU | 3  | Plata          |

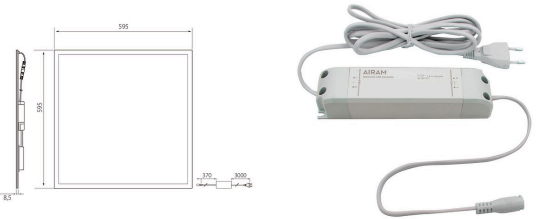

## IP20 40W/830 EU PSO WH

EC002892 Ceiling / wall luminaire

| Mounting                                                                         |                      | Structure                                                                    |                                         |
|----------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------|-----------------------------------------|
| Suitable for wall mounting                                                       | No                   | With mounting material                                                       | Yes                                     |
| Suitable for suspended mounting                                                  | Yes                  | Lamp type                                                                    | LED not exchangeable                    |
| Suitable for ceiling mounting                                                    | Yes                  | Light source included                                                        | Yes                                     |
| Suitable for recessed mounting                                                   | Yes                  | Suitable for number of lamps                                                 | 1                                       |
| Suitable for surface mounting                                                    | Yes                  | Lamp holder                                                                  | Other                                   |
| Suitable for light line configuration                                            | No                   | Housing material                                                             | Aluminium                               |
| Suitable for clamp-mounting                                                      | No                   | Housing surface protection                                                   | Powder coating                          |
| Fit for workplace acc. EN 12464-1                                                | No                   | Housing colour                                                               | White                                   |
| Degree of protection (IP)                                                        | IP20                 | Cover material                                                               | Plastic, opal                           |
| Degree of protection (IP), rear side                                             | IP20                 | Type of grid                                                                 | None                                    |
| Degree of protection (IP), front side                                            | IP20                 | Control gear included                                                        | Yes                                     |
| Max. number of luminaires per miniature circuit breaker C10 (MCB)                | 35                   | Exchangeable control gear                                                    | Yes                                     |
| Max. number of luminaires per miniature circuit breaker B16                      | 34                   | Energy efficiency class of light source according to EU regulation 2019/2015 | E                                       |
| Max. number of luminaires per miniature circuit breaker C16                      | 52                   | Containing product according to 2019/2020/EU                                 | Yes                                     |
| Impact strength                                                                  | IK02                 | Emergency power supply system                                                | None                                    |
| Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24 | Yes                  | Emergency power supply integrated                                            | No                                      |
| Suitable for emergency lighting                                                  | No                   | With switch                                                                  | No                                      |
| Emergency function monitoring system                                             | None                 | With air slots                                                               | No                                      |
| Luminaire may be covered with thermally insulating material                      | No                   | Filament test according to IEC 60695-2-11                                    | 650 °C - 30 s                           |
| Type of wiring                                                                   | Ending               | Electrotechnical data                                                        |                                         |
| Number of poles                                                                  | 2                    | Voltage type                                                                 | AC                                      |
| Conductor cross section (mm <sup>2</sup> )                                       | 0.75 mm <sup>2</sup> | Nominal voltage (min) (V)                                                    | 220 V                                   |
| Connection type                                                                  | Plug                 | Nominal voltage (max) (V)                                                    | 240 V                                   |
| Connectable conductor cross section (min) (mm <sup>2</sup> )                     | 1.5 mm <sup>2</sup>  | Nominal current (min) (mA)                                                   | 1100 mA                                 |
| Connectable conductor cross section (max) (mm <sup>2</sup> )                     | 2.5 mm <sup>2</sup>  | Nominal current (max) (mA)                                                   | 1100 mA                                 |
|                                                                                  |                      | Type of control gear                                                         | LED operating device current-controlled |
|                                                                                  |                      | Protection class according to IEC 61140                                      | II                                      |
|                                                                                  |                      | Suitable for lamp power (min) (W)                                            | 40 W                                    |
|                                                                                  |                      | Suitable for lamp power (max) (W)                                            | 40 W                                    |
|                                                                                  |                      | Luminaire efficacy (min) (lm/W)                                              | 103 lm/W                                |
|                                                                                  |                      | Luminaire efficacy (max) (lm/W)                                              | 103 lm/W                                |
|                                                                                  |                      | Maximum system power (W)                                                     | 40 W                                    |
|                                                                                  |                      | Luminaire efficacy (lm/W)                                                    | 103 lm/W                                |
|                                                                                  |                      | Power factor                                                                 | 0.9                                     |
|                                                                                  |                      | Total harmonic distortion (THD) (%)                                          | 20 %                                    |
|                                                                                  |                      | Total harmonic distortion                                                    | 20 THD                                  |

| Dimming and control                       |     |
|-------------------------------------------|-----|
| Dimmable                                  | No  |
| Dimming 0-10 V                            | No  |
| Dimming 1-10 V                            | No  |
| Dimming DALI                              | No  |
| Dimming DALI-2                            | No  |
| Dimming DMX                               | No  |
| Dimming DSI                               | No  |
| Dimming LineSwitch                        | No  |
| Dimming manufacturer's proprietary system | No  |
| Dimming mains voltage modulation          | No  |
| Dimming trailing edge                     | No  |
| Dimming leading edge                      | No  |
| Dimming programmable                      | No  |
| Dimming potentiometer (integrated)        | No  |
| Dimming RF                                | No  |
| Dimming Sine Wave Reduction               | No  |
| Dimming Touch and Dim                     | No  |
| Dimming Zigbee                            | No  |
| Dimming with push-button                  | No  |
| No dimming function                       | Yes |
| With presence indicator                   | No  |
| With movement sensor                      | No  |
| With light sensor                         | No  |
| Constant luminous flux control            | No  |
| Bluetooth operated                        | No  |
| Compatible with Casambi                   | No  |
| Compatible with Apple HomeKit             | No  |
| Compatible with Google Assistant          | No  |
| Compatible with Amazon Alexa              | No  |
| IFTTT support available                   | No  |

| Photometric data                                          |                           |
|-----------------------------------------------------------|---------------------------|
| Light distributor                                         | Diffuser lens/optic/panel |
| Light sharing                                             | Symmetric                 |
| Beam angle                                                | Open beam                 |
| Colour consistency (McAdam ellipse)                       | SDCM3                     |
| Light outlet                                              | Direct                    |
| Rated luminous flux according to IEC 62722-2-1 (min) (lm) | 4100 lm                   |
| Rated luminous flux according to IEC 62722-2-1 (max) (lm) | 4100 lm                   |
| Colour of light (alphanumeric)                            | White                     |
| Effective luminous flux (lm)                              | 4100 lm                   |
| Colour temperature (min) (K)                              | 3000 K                    |
| Colour temperature (max) (K)                              | 3000 K                    |
| Flickering value Pst LM                                   | 1                         |
| Colour rendering index (CRI/Ra)                           | 80-89                     |
| Stroboscope effect value SVM                              | 0.4                       |
| Photobiological safety according to EN 62471              | RG0                       |
| Unified Glare Rating (UGR)                                | 22                        |
| Colour temperature switchable                             | No                        |
| Lumen setting adjustable                                  | No                        |
| Beam angle adjustable                                     | No                        |

| Lifetime and capacity                                                           |          |
|---------------------------------------------------------------------------------|----------|
| Rated life time L70/B50 at 25 °C (h)                                            | 100000 h |
| Rated life time L80/B50 at 25 °C                                                | 60000 h  |
| Lumen maintenance at median useful life of 35,000 hrs at 25 °C ambient (tq) (%) | 90 %     |
| Lumen maintenance at median useful life of 50,000 hrs at 25 °C ambient (tq) (%) | 85 %     |
| Lumen maintenance at median useful life of 75,000 hrs at 25 °C ambient (tq) (%) | 80 %     |
| Failure rate at median useful life of 35,000 hrs at 25 °C ambient (tq) (%)      | 5 %      |
| Failure rate at median useful life of 50,000 hrs at 25 °C ambient (tq) (%)      | 5 %      |
| Failure rate at median useful life of 75,000 hrs at 25 °C ambient (tq) (%)      | 10 %     |
| Rated ambient temperature acc. IEC62722-2-1 (min) (°C)                          | 0 °C     |
| Rated ambient temperature acc. IEC62722-2-1 (max) (°C)                          | 25 °C    |

| Measurements               |        |
|----------------------------|--------|
| Width (mm)                 | 595 mm |
| Height/depth (mm)          | 8.5 mm |
| Length (mm)                | 595 mm |
| Built-in length (mm)       | 600 mm |
| Built-in width (mm)        | 600 mm |
| Built-in height/depth (mm) | 80 mm  |