




Liitäntälaitteet 24V CV-DRIVER 24V 30W IP20

Power sources for 24 V LED strips for indoor and outdoor use.

30W 24V IP20 A power source for Coloris and Ambiance LED strips. The power source is equipped with an integrated connection box to enable easy installation and linking.

CV-DRIVER 24V 30W IP20

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4016031	A1LEAA	0.15	Liitäntälaitteet 24V

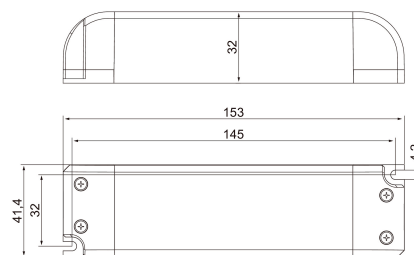

CV-DRIVER 24V 30W IP20

EC002710

Mounting	
Suitable for outdoor use	No
Degree of protection (IP)	IP20

Structure	
Model	Static
Housing	Plastic housing
Emergency power supply system	None

Dimming and control	
Dimmable	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming D4i	No
Dimming DALI	No
Dimming DALI-2	No
Dimming DMX	No
Dimming DSI	No
Dimming LineSwitch	No
Dimming mains voltage modulation	No
Dimming manufacturer's proprietary system	No
Dimming trailing edge	No
Dimming leading edge	No
Dimming potentiometer (integrated)	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming with push-button	No
Dimming Zigbee	No
No dimming function	Yes
Constant luminous flux control	No
Bluetooth operated	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
Compatible with Casambi	No
IFTTT support available	No

Photometric data	
------------------	--

Lifetime and capacity	
Ambient temperature (min) [°C]	0
Ambient temperature (max) [°C]	25
Driver lifetime (h)	50000

Measurements	
Length (mm)	153
Width (mm)	41
Height (mm)	32

Electrotechnical data	
Suitable for constant current	No
Suitable for constant voltage	Yes
Output voltage (min) (V)	24
Output voltage (max) (V)	24
Output current (max) (mA)	1025
Suitable for DC-voltage (primary side)	No
Output power (min) (W)	1
Input voltage (min) (V)	220
Input voltage (max) (V)	240
Frequency input voltage (min) (Hz)	50
Frequency input voltage (max) (Hz)	60
Protection class according to IEC 61140	II